


ABC TAUREX[▲] COEX

MODELS	TAUREX COEX 1500	TAUREX COEX 1700	TAUREX COEX 1900
Max. Film Width Maks. Film Geniřliđi	1300mm	1500mm	1700mm
Thickness of the Film Film Kalınlıđı	25-100 micron	25-100 micron	25-100 micron
Max. Output Capacity / Maks. Üretim Kapasitesi	300kg/h	350 kg/h	400kg/h
EXTRUSION UNIT – EKSTRÜZYON ÜNİTESİ			
Main Motor Ana Motor	A: 45kW B: 90kW C:45kW	A: 55kW B: 90kW C:55kW	A: 55kW B: 110kW C:55kW
Screw Diameter Vida Çapı	A: Ø 55 B: Ø 75 C: Ø 55	A: Ø 65 B: Ø 90 C: Ø 65	A: Ø 65 B: Ø 90 C: Ø 65
Screw & Barrel Material / Vida & Kovan Malzemesi	8550 Steel Bimetallic	8550 Steel Bimetallic	8550 Steel Bimetallic
Screw Ratio L/D Vida Orantısı	32:1	32:1	32:1
Barrel Air Cooling Fans Kovan Sođutma Fanları	A ve C:4 X 0,18kW B:4 X 0,25kW	A ve C:4 X 0,18kW B:5 X 0,25kW	A ve C:4 X 0,18kW B:5 X 0,25kW
Type of Screen Changer Süzgeç Tipi	Hydraulic Filter Hidrolik Filtre	Hydraulic Filter Hidrolik Filtre	Hydraulic Filter Hidrolik Filtre
DIE UNIT – KAFA ÜNİTESİ			
Type of The Die Head Kafa Tipi	Fixed Die Sabit Kafa	Fixed Die Sabit Kafa	Fixed Die Sabit Kafa
Die Diameter Kafa Çapı	LDPE: Ø250mm	LDPE: Ø300mm	LDPE: Ø350mm
Air Blower Fan Balon Sođutma Fanı	15kW	22kW	22kW
HAUL-OFF UNIT – ÇEKİCİ ÜNİTESİ			
Type of The Tower Kule Tipi	Rotary Tower Döner Kule	Rotary Tower Döner Kule	Rotary Tower Döner Kule
Haul-Off Roller Dia. & Width Çekici Silindir Çapı & Geniřliđi	Ø240mm-1500mm	Ø240mm-1700mm	Ø240mm-1900mm
Haul-Off Motor Çekici Silindir Motoru	2.2kW	3kW	3kW
Height of The Machine Kule Yüksekliđi	12.5 m	12.5 m	12.5 m
WINDER UNIT – SARGI ÜNİTESİ			
Type of Winder Sargı Tipi	Automatic Winder Otomatik Sargı	Automatic Winder Otomatik Sargı	Automatic Winder Otomatik Sargı
Winder Roller Dia. & Width Sarcı Silindir Çapı & Geniřliđi	Ø477mm-1500mm	Ø477mm-1700mm	Ø477mm-1900mm
Winder Roller Motor Sarcı Silindir Motoru	2.2kW	3kW	3kW
Max. Roll Diameter Maks. Bobin Çapı	600mm	600mm	600mm

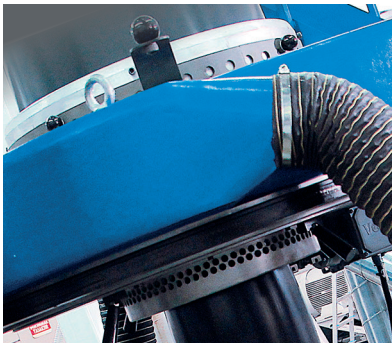

TAUREX COEX 2100	TAUREX COEX 2600	TAUREX COEX 3100
1900mm	2400mm	2900mm
25-100mm	25-100mm	25-100mm
450 kg/h	500kg/h	600kg/h
EXTRUSION UNIT – EKSTRÜZYON ÜNİTESİ		
A:55kW B:90kW C:55kW	A: 55kW B: 90kW C: 55kW	A:75kW B:132kW C:75kW
A: Ø 65 B: Ø 90 C: Ø 65	A: Ø 65 B: Ø 90 C: Ø 65	A: Ø 75 B: Ø 100 C: Ø 75
8550 Steel Bimetallic	8550 Steel Bimetallic	8550 Steel Bimetallic
32:1	32:1	32:1
A ve C:4 X 0,18kW B:5 X 0,25kW	A ve C:4 X 0,18kW B:5 X 0,25kW	A ve C:4 X 0,25kW B:6X0,25kW
Hydraulic Screen Hidrolik Filtre	Hydraulic Screen Hidrolik Filtre	Hydraulic Screen Hidrolik Filtre
DIE UNIT – KAFA ÜNİTESİ		
Fixed Die Sabit Kafa	Fixed Die Sabit Kafa	Fixed Die Sabit Kafa
Ø350mm	Ø450mm	Ø500mm
22kW	22kW	30kW
HAUL-OFF UNIT – ÇEKİCİ ÜNİTESİ		
Rotary Tower Döner Kule	Rotary Tower Döner Kule	Rotary Tower Döner Kule
Ø240mm-2100mm	Ø240mm-2600mm	Ø240mm-3100mm
3kW	3kW	4kW
12.5 m	15.5m	15.5m
WINDER UNIT – SARGI ÜNİTESİ		
Automatic Winder Otomatik Sargı	Automatic Winder Otomatik Sargı	Automatic Winder Otomatik Sargı
Ø477mm-2100mm	Ø477mm-2600mm	Ø477mm-3100mm
3kW	3kW	4kW
600mm	600mm	600mm

**Shortcut to our
Plastic Processing
Technology**

Plastik İşleme
Teknolojimize Kısa
Yoldan Ulaşın



High Quality Film Production with Mono Fixed Die, Rotating Tower

Mono Split Kafa,
Döner Kule İle Yüksek Kaliteli
Film Üretimi

STANDARD PARTS — STANDART AKSAMLAR

- Thermoregulation System for Extruder Feeding Zone
- Internal Bubble Cooling System (IBC)
- Heat Exchanger
- Bubble Guide
- Secondary Nip
- Edge Guide
- Technical Service Support with Remote Connection
- Ekstrüder Besleme Bölgesi için Termoregülasyon Sistemi
- İçten Balon Soğutma Sistemi (IBC)
- Eşanjör Grubu
- Balon Tutucu
- Ara Çekici
- Kenar Kontrol
- Uzaktan Bağlantı İle Teknik Servis Desteği

OPTIONAL PARTS — OPSİYONEL AKSAMLAR

- Corona Teater
- 4 Component Dosing Unit
- 6 Component Dosing Unit
- Air Ring With Tickness Control
- Hot Slitting Unit
- Korona Cihazı
- 4 Komponentli Dozajlama Ünitesi
- 6 Komponentli Dozajlama Ünitesi
- Kalınlık Kontrollü Hava Başlığı
- Sıcak Dilimleme Ünitesi